


Critical Hydronic Temp Sensing Application?

Need adjustable insertion depth to insure good thermal conductivity and fast response?

Desire a quick-change mount to remove sensor for calibration verification?

Need reliability in humid environments?

Require a small profile to accommodate pipe thermal insulation?

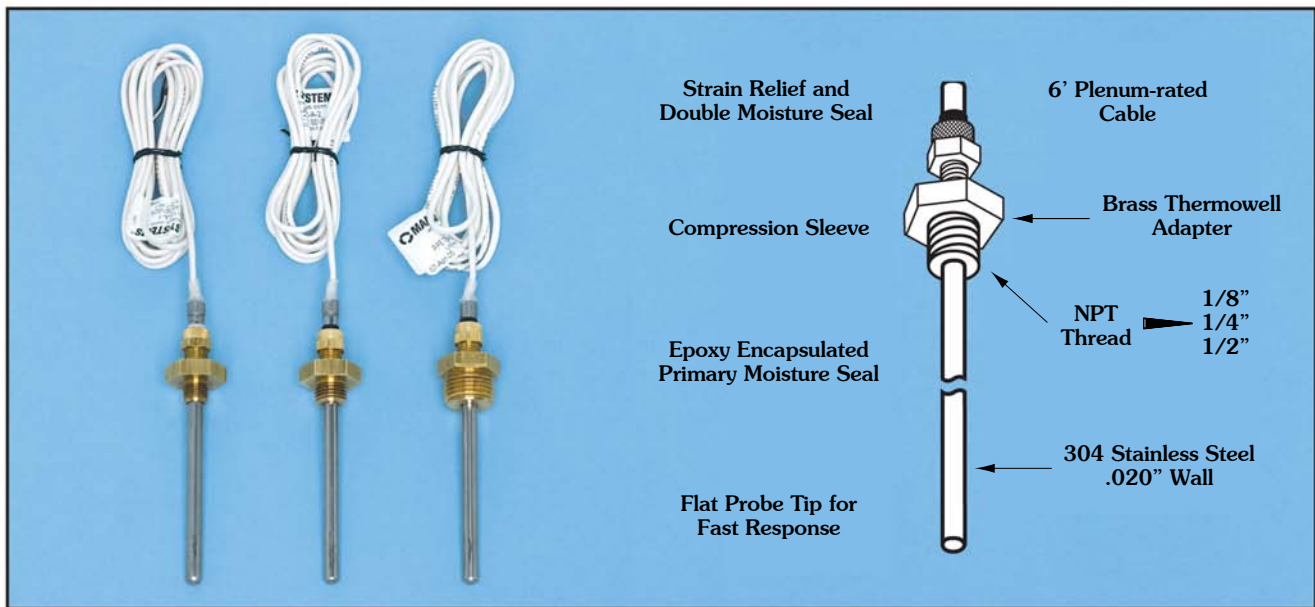

TE-703A Temperature Sensors incorporate unique design features to address the above requirements. Simply screw the brass adapter into the thermowell, insert the probe until it touches the bottom, tighten the compression sleeve, and you are done! To remove the probe for testing, loosen the compression sleeve and just pull it out.

More than 12 types of thermistors and RTDs for universal compatibility, triple moisture sealed for reliability, flat probe tip for direct thermal contact between sensing element and thermowell, low profile for fast and easy thermal insulation coverage and lowest installed cost!

MAMAC SYSTEMS®

www.mamacsys.com

USA: 800-843-5116 Canada: 800-551-7120 United Kingdom: 01384-271113
Australia: 800-88-2691 Singapore: 656-3927273