

PNEUMATIC PRESSURE TRANSDUCER

For Additional Information See PR-243 Data Sheet

SPECIFICATIONS

Accuracy*: ± 1% FS

Maximum Pressure: 40 PSIG

Supply Voltage: 12–40 VDC
 12–35 VAC (VDC output units only)

Supply Current: VDC Units – 10 mA max.
 mA Units – 20 mA max.

Enclosure: 18 Ga C. R. Steel NEMA 4 (IP-65)

Finish: Baked on enamel – PMS2GR88B

Conformance: EMC Standards EN50082-1(1992)
 EN55014(1993)/EN60730-1(1992)

Compensated Temp Range: 0°F to 180°F (-18°C to 82°C)

T. C. Error: ±0.025%/°F (.03%/°C)

Media Compatibility: Clean dry air or any inert gas

Port Connection: 5/32" I.D.; 1/4" Brass Hose Barb

Environmental: 10–90%RH Non-Condensing

Termination: Unpluggable screw terminal block

Wire Size: 12 Ga max.


Load Impedance: 1.6K ohms max. at 40 VDC (mA output units)
 1K ohms min. (VDC output units)

Weight: Enclosure 1.0 lbs. (.45 kg)

**Includes non-linearity, hysteresis and non-repeatability*

ORDERING INFORMATION: PR-243-

RANGE	OUTPUT
R1 (psig) 0 to 20 / 0 to 10 / 0 to 5	mA (4–20 mA 2-wire)
R2 (psig) 0 to 30 / 0 to 15 / 0 to 7.5	VDC (0–5 VDC/0–10 VDC field selectable)
R3 (psig) 3 to 15	
R4 (kPa) 0 to 140 / 0 to 70 / 0 to 35	
R5 (kPa) 0 to 200 / 0 to 100 / 0 to 50	
R6 (kPa) 20 to 100	

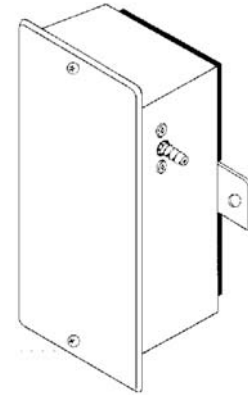

INSTALLATION

Inspection Inspect the package for damage. If damaged, notify the appropriate carrier immediately. If undamaged, open the package and inspect the device for obvious damage. Return damaged products.

- Requirements**
- Tools (*not provided*)
 - Digital Volt-ohm Meter (DVM)
 - Appropriate screwdriver for mounting screws
 - Appropriate drill and drill bit for mounting screws
 - Appropriate accessories
 - Two #8 self-tapping mounting screws (*not provided*)
 - Training: Installer must be a qualified, experienced technician

Warning:



- Do not use on oxygen service, in an explosive/hazardous environment, or with flammable/combustible media.
- Disconnect power supply before installation to prevent electrical shock and equipment damage.
- Make all connections in accordance with the job wiring diagram and in accordance with national and local electrical codes. Use copper conductors only.

Caution:



- Use electrostatic discharge precautions (e.g., use of wrist straps) during installation and wiring to prevent equipment damage.
- Avoid locations where severe shock or vibration, excessive moisture or corrosive fumes are present. NEMA Type 4 housings are intended for outdoor use primarily to provide a degree of protection against wind-blown dust, rain, and hose-directed water.
- Do not exceed ratings of the device.

Mounting

The PR-243 must be mounted on a vertical surface with the 1/4" brass hose barb pointing left or right. Refer to **Figure 7** for mounting dimensions.

1. Remove the transducer cover using a Phillips head screwdriver.
2. Select the mounting location.
3. Mount transducer on a vertical surface with two #8 self-tapping screws (not provided).
4. Pull wires through bottom of enclosure and make necessary connections.
5. Replace cover and make pneumatic connections.

Wiring

Use maximum 12 AWG wire for wiring terminals. Use flexible 1/4" O.D., 5/32" I.D. tubing for pressure connections. Refer to **Figures 1, 2, 3, & 4** for wiring information. and **Figures 5 & 6** for switch designations.


(Wiring Instructions continued on pages 2 and 3.)



PNEUMATIC PRESSURE TRANSDUCER

Wiring PR-243 Units with mA Output

PR-243 Pressure Transducer with mA Output

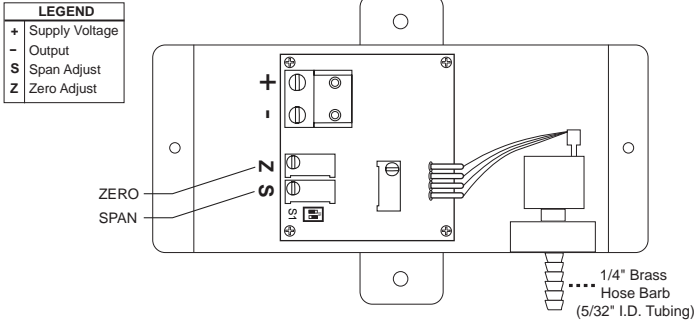

The PR-243 mA output pressure transducers are 4–20 mA output units powered with a 12–40 VDC supply.

The following describes the proper wiring of these pressure transducers with mA output:

1. Remove the terminal block by carefully pulling it off the circuit board.
2. Locate the [+] and [-] terminal markings on the board.
3. Attach the supply voltage to the [+] lead.
4. Connect the 4–20 mA output ([-] terminal) to the controller's input terminal.
5. Ensure that the power supply common is attached to the common bus of the controller.
6. Re-insert the terminal block to the circuit board and apply power to the unit.
7. Check for the appropriate output signal using an ammeter set on DC milliamps connected in series with the [-] terminal.

TYPICAL APPLICATIONS (wiring diagrams)

Figure 1 and Figure 2 illustrate typical wiring diagrams for the PR-243, 4–20 mA, two-wire output pressure transducers.

Figure 1 – Wiring for mA Output Transducers with an External DC Power Supply



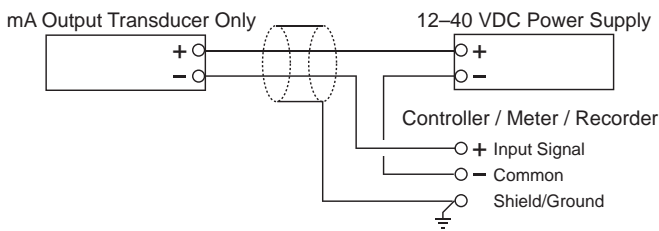


Figure 2 – Wiring for mA Output Transducers where the Controller or Meter has an Internal DC Power Supply

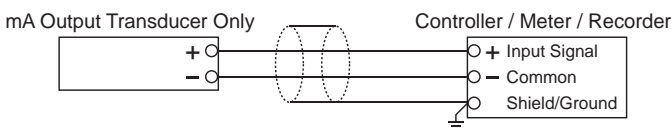

Wiring PR-243 Units with VDC Output

PR-243 Pressure Transducer with VDC Output

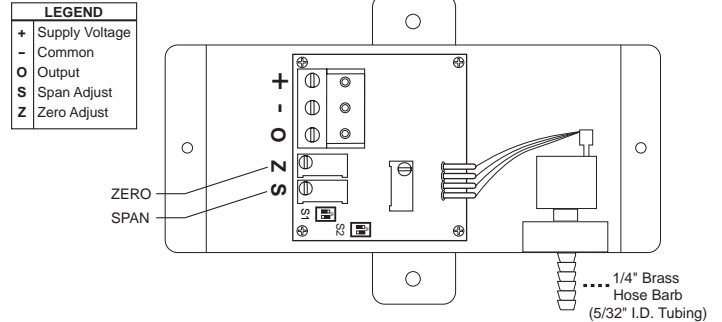

The PR-243 pressure transducers with VDC output are field selectable 0–5 VDC or 0–10 VDC output and can be powered with either a 12–40 VDC or 12–35 VAC.

The following describes the proper wiring of these pressure transducers with VDC output:

1. Remove the terminal block by carefully pulling it off the circuit board.
2. Locate the [+], [-] and [O] terminal markings on the board.
3. Attach the power wires to the [+] and [-] terminals. The [-] terminal is also the negative terminal.
4. Connect the [O] terminal, which is the positive VDC output terminal, to the controller's input terminal.
5. Re-insert the terminal block to the circuit board and apply power to the unit.
6. Check the appropriate VDC output using a voltmeter set on DC volts connected to the [O] and [-] terminals.

TYPICAL APPLICATIONS (wiring diagrams)

Figure 3 and Figure 4 illustrate typical wiring diagrams for the PR-243, 0–5/0–10 VDC output pressure transducers.

Figure 3 – Wiring for VDC Pressure Transducers when applied with External AC Supply


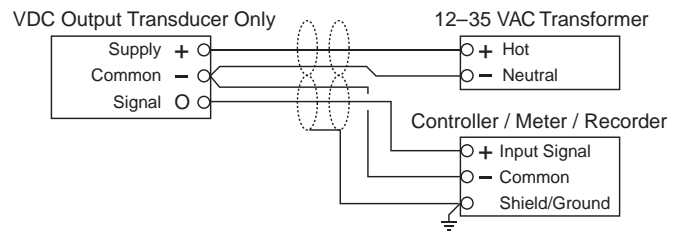


Figure 4 – Wiring for VDC Pressure Transducers when applied with External DC Supply



Caution: If you are using grounded AC, the hot wire must be on the [+] terminal. Also, if you are using a controller without built-in isolation, use an isolation transformer to supply the PR-243 transducer.

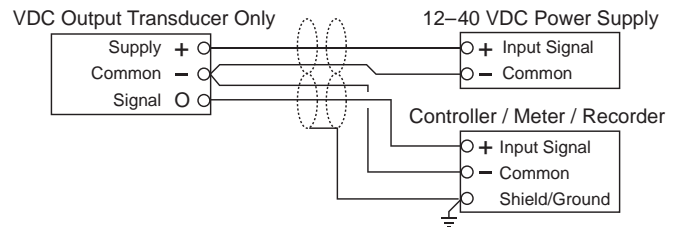

Caution: This product contains a half-wave rectifier power supply and must not be powered off transformers used to power other devices utilizing non-insolated full-wave rectifier power supplies.



Caution: When multiple PR-243 units are powered from the same transformer, damage will result unless all 24G power leads are connected to the same power lead on all devices. It is mandatory that correct phasing be maintained when powering more than one device from a single transducer.

PNEUMATIC PRESSURE TRANSDUCER

Range Configuration:

Switch 1 (S1)

R1 / R4	0–20 psig / 0–140 kPa (default)	
	0–10 psig / 0–70 kPa	
	0–5 psig / 0–35 kPa	
R2 / R5	0–30 psig / 0–200 kPa (default)	
	0–15 psig / 0–100 kPa	
	0–7.5 psig / 0–50 kPa	
R3 / R6	3–15 psig / 20–100 kPa (default)	


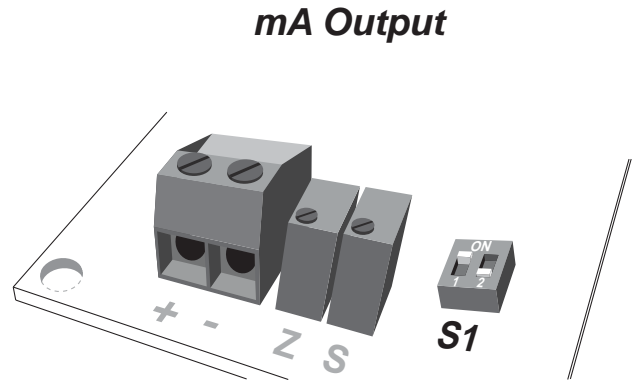


Figure 5 – Range Configurations for Pressure Transducers with mA Outputs

Range Configuration:

Switch 1 (S1)

R1 / R4	0–20 psig / 0–140 kPa (default)	
	0–10 psig / 0–70 kPa	
	0–5 psig / 0–35 kPa	
R2 / R5	0–30 psig / 0–200 kPa (default)	
	0–15 psig / 0–100 kPa	
	0–7.5 psig / 0–50 kPa	
R3 / R6	3–15 psig / 20–100 kPa (default)	

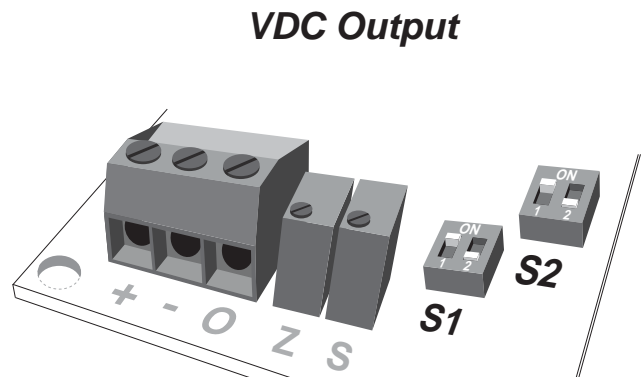

Output Configuration:

Switch 2 (S2)

0–10 VDC (default)	
0–5 VDC	

Figure 6 – Range Configurations for Pressure Transducers with VDC Outputs



PNEUMATIC PRESSURE TRANSDUCER

- CHECKOUT**
1. Verify that the unit is mounted in the correct position.
 2. Verify appropriate input signal and supply voltage.



CAUTION: Never connect 120 VAC to these transducers. Never connect AC voltage to a unit intended for DC supply.

3. Verify appropriate configuration range.

Transducer Operation

This is a rough functional check only.

1. Adjust the pressure to obtain maximum output signal for appropriate range.
2. Output should be 20 mA or 5 or 10 VDC.
3. Adjust the pressure to obtain minimum output signal.
4. Output should be 4 mA or 0 VDC.

NOTE: The PR-243 is a highly accurate device. For applications requiring a high degree of accuracy, the use of laboratory quality meters and gauges are recommended.

CALIBRATION All units are factory calibrated to meet or exceed published specifications. If field adjustment is necessary, follow the instructions below.

Calibration of PR-243 mA Units

1. Connect terminals [+] and [-] to the appropriate power source.
2. Connect the DVM in series on the [-] terminal.
3. Apply low pressure to the unit and carefully adjust the zero trimmer [Z] to obtain desired low output.
4. Apply high pressure to the unit and adjust span trimmer [S] to obtain the desired high output pressure.
5. Repeat steps 3 and 4 until desired calibration is achieved.

Calibration of PR-243 VDC Units

1. Connect terminals [+] and [-] to the appropriate power source. The [-] terminal is also the negative output terminal.
2. Connect the DVM on DC volts across [0] and [-] terminal.
3. Apply low pressure to the unit and carefully adjust the zero trimmer [Z] to obtain desired low output.
4. Apply high pressure to the unit and adjust span trimmer [S] to obtain the desired high output pressure.
5. Repeat steps 3 and 4 until desired calibration is achieved.



MAINTENANCE Regular maintenance of the total system is recommended to assure sustained optimum performance.

FIELD REPAIR None. Replace with a functional unit.

WARRANTY See Data Sheet for additional information.

DIMENSIONAL DATA

Figure 7 – PR-243 Pneumatic Pressure Transducer Dimensions shown in inches and millimeters (mm).

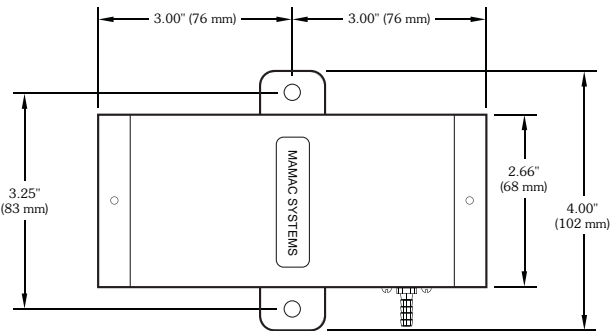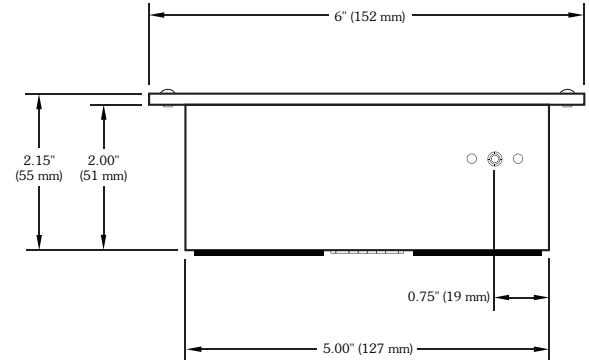

For Technical / Application Assistance call your nearest office



8189 Century Boulevard • Minneapolis, MN 55317-8002 • USA
 800-843-5116 • 952-556-4900 • Fax 952-556-4997
 sales@mamacsys.com • www.mamacsys.com

EUROPE
Baird House, Units 6 & 7 Dudley Innovation Centre Pensnett Estate • Kingswinford West Midlands • DY6 8XZ United Kingdom 01384-271113 • Fax 01384-271114

AUSTRALIA
4 Arminger Court, Unit 2 Holden Hill • S.A. 5088 Australia 08-8359-4333 • Fax 08-8395-4433

ASIA
No. 22 Lorong 21A Geylang #11-02 Prosper Industrial Building Singapore • 388421 656-3927273 • Fax 656-3927276

CANADA
155 McIntosh Drive, Unit 5 Markham • Ontario • L3R 0N6 Canada 905-474-9215 • Fax 905-474-0876

MAMAC Systems, Inc., reserves the right to change any specifications without notice to improve performance, reliability, or function of our products.